



Vacuum oven "Vaciotem-T"

DIGITAL TEMPERATURE AND TIMER CONTROL.
 CONTROLLABLE TEMPERATURE FROM 35 °C TO 200 °C.
 STABILITY ±1 °C. HOMOGENEITY ±2 °C. SET ERROR ±1 °C. RESOLUTION 1 °C.



SAFETY:

OVER TEMPERATURE CUT OUT FITTED IN ACORDANCE WITH THE EN.61010 STANDARD.
 DIN 12880.2 STANDARD ADJUSTABLE SAFETY THERMOSTAT FITTED.


FEATURE

- Digital electronic control of temperature and pre-selected programmable timer.
- Running time range: from 1 minute to 9hrs 59 min. or 99.9 hrs.
- Pre-program start time, (wait time range): 1 hr to 24 hrs
- Temperature sensor Pt100
- Heating element place evenly around the chamber.
- Chamber made from AISI 304 stainless steel.
- Trays made from anodised aluminium.
- Door with hardened glass window, which sits on to a silicon gasket that absorbs any contractions and expansions that may occur.
- Vacuum port with bleed valve
- Air valve at the front
- Vacuum pump connection at the back.
- Epoxy covered outer case.
- RS-232 output download or to a printer of all parameters.



CONTROL PANEL

1. RS 232 connector.
2. Air inlet.
3. Air inlet valve.
4. Vacuum gauge.
15. Temperature mode indicator.
16. Time mode indicator.
17. In operation indicator.
18. Waiting time indicator.
19. Time and temperature digital display.
20. Push button select temperature.
21. Push button select time.
22. Push button increase value.
23. Push button reduce value.
24. Push button STOP/START.
25. Mains switch.
26. Safety thermostat indicator lamp.
27. Vacuum pump control switch.

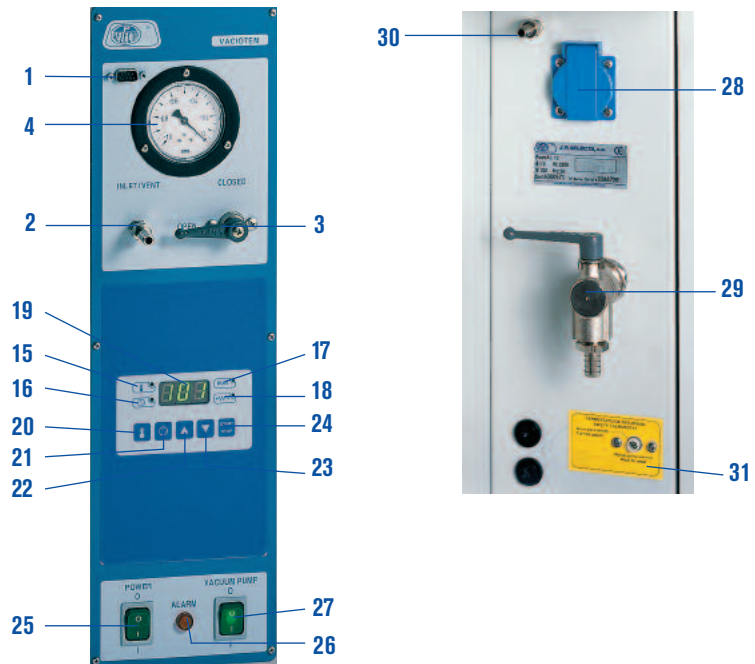

BACK

28. Vacuum pump power connection.
29. Vacuum connection.
30. Air inlet.
31. Adjustable safety thermostat.

MODEL

Part No.	Vacuum Max.	Capacity litres	Ø / Depth (interior) cm	Height / Width / Depth (exterior) cm	Shelves	Power W	Weight Kg
4001489	10 ⁻² mm Hg	47	34 52	54 76 70	2	2000	73

Note: To obtain the optimum homogeneity at the set temperature, the load should not surpass more than 70 % of the volume of the chamber.

ACCESSORIES (see page 136).



Vacuum drying oven “Vaciotem-TV”

DIGITAL TEMPERATURE CONTROL, ELECTRONIC VACUUM PRESSURE DISPLAY AND TIMER.
 CONTROLLABLE TEMPERATURE FROM 35 °C TO 200 °C
 STABILITY ± 1 °C. HOMOGENEITY ± 2 °C. SET ERROR ± 1 °C. RESOLUTION 1 °C.



SAFETY:

OVER TEMPERATURE CUT OUT FITTED IN ACORDANCE WITH THE EN.61010 STANDARD.
 DIN 12880.2 STANDARD ADJUSTABLE SAFETY THERMOSTAT FITTED.

FEATURE

- Digital electronic control of: temperature, vacuum pressure and pre-selected programmable timer.
- Temperature sensor Pt100
- Automatic air inlet at the end of the operation cycle.
- Heating element placed evenly around the chamber.
- Chamber made from AISI 304 stainless steel.
- Trays made from anodised aluminium.
- Door with hardened glass window, which sits on to a silicon gasket that absorbs any contractions and expansions that may occur.
- Vacuum port with bleed valve.
- Air valve at the front.
- Vacuum pump connection at the back.
- Epoxy covered outer case.
- RS-232 output download or to a printer of all parameters.



CONTROL PANEL

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. RS232 interface. 2. Air inlet. 3. Air inlet valve. 5. Vacuum pressure indicator lamp. 6. Air inlet valve indicator lamp, end of cycle. 7. Running indicator lamp. 8. Under vacuum indicator lamp. 9. Digital vacuum display in mbar. 10. Push button select vacuum. 11. Push button select electronic valve at the end of the cycle. 12. Push button increase value. 13. Push button decrease value. 14. Push button STOP/START. 15. Indicator mode temperature. 16. Indicator mode time. 17. Indicator operating. 18. Indicator mode waiting time. 19. Digital display of temperature or time. | <ol style="list-style-type: none"> 20. Push button select temperature. 21. Push button select time. 22. Push button increase value. 23. Push button decrease value. 24. Push button STOP/START. 25. Mains switch. 26. Safety thermostat in operation. |
|---|--|

BACK

27. Air inlet.
28. Pump power connection.
29. Vacuum connection.
30. Adjustable safety thermostat



MODEL

Part No.	Vacuum Max.	Capacity litres	Ø / Depth (interior) cm	Height / Width / Depth (exterior) cm	Shelves	Power W	Weight Kg
4001490	10 ⁻² mm Hg	47	34 52	54 76 70	2	2000	73

Note: To obtain the optimum homogeneity at the set temperature, the load should not surpass more than 70 % of the volume of the chamber.

ACCESSORIES (see page 136).